



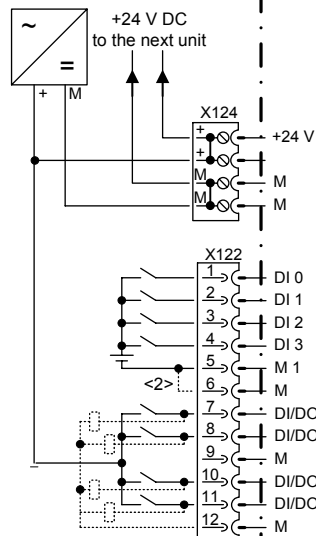


CX32

<3>

Simulation for DI 0...DI 11

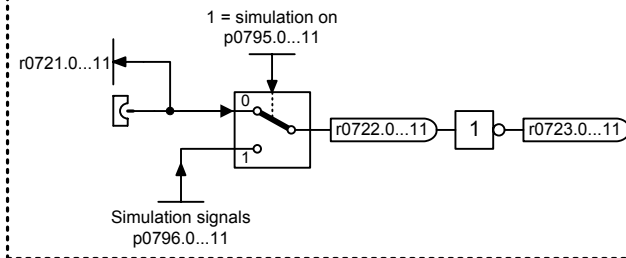

p0799 (4000.00 μs)

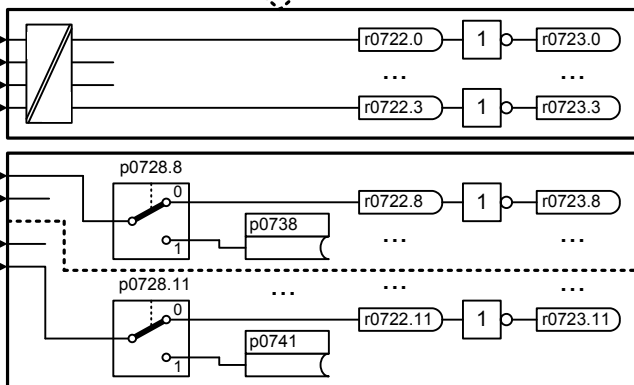

4 electrically isolated digital inputs

[2220]

4 bidirectional digital inputs/outputs

[2230]

[2231]

- <1> For SERVO drive object, the following applies:
Fast measuring probe inputs.
- <2> Jumper open, electrical isolation for DI 0...3.
- <3> Can only be used in conjunction with drive object CU_I
(e.g. SIMOTION D).

1	2	3	4	5	6	7	8
DO: CX32					fp_1512_51_eng.vsd	Function diagram	
Overviews - CX32 input/output terminals					13.06.07 V02.05.00	SINAMICS	
							- 1512 -