


TIME - CURRENT CURVES
ET® CIRCUIT BREAKER
JL FRAME
70 TO 400 AMPERES
40° C
TWO AND THREE POLE
I.T.E. IMPERIAL CORPORATION

INSTANTANEOUS TRIP

RATING IN AMPERES	ADJ. INSTANTANEOUS TRIP SETTING AMPERES
70 TO 175	750 TO 1600
200 TO 225	960 TO 2000
250 TO 300	1050 TO 2250
350 TO 400	1900 TO 3600

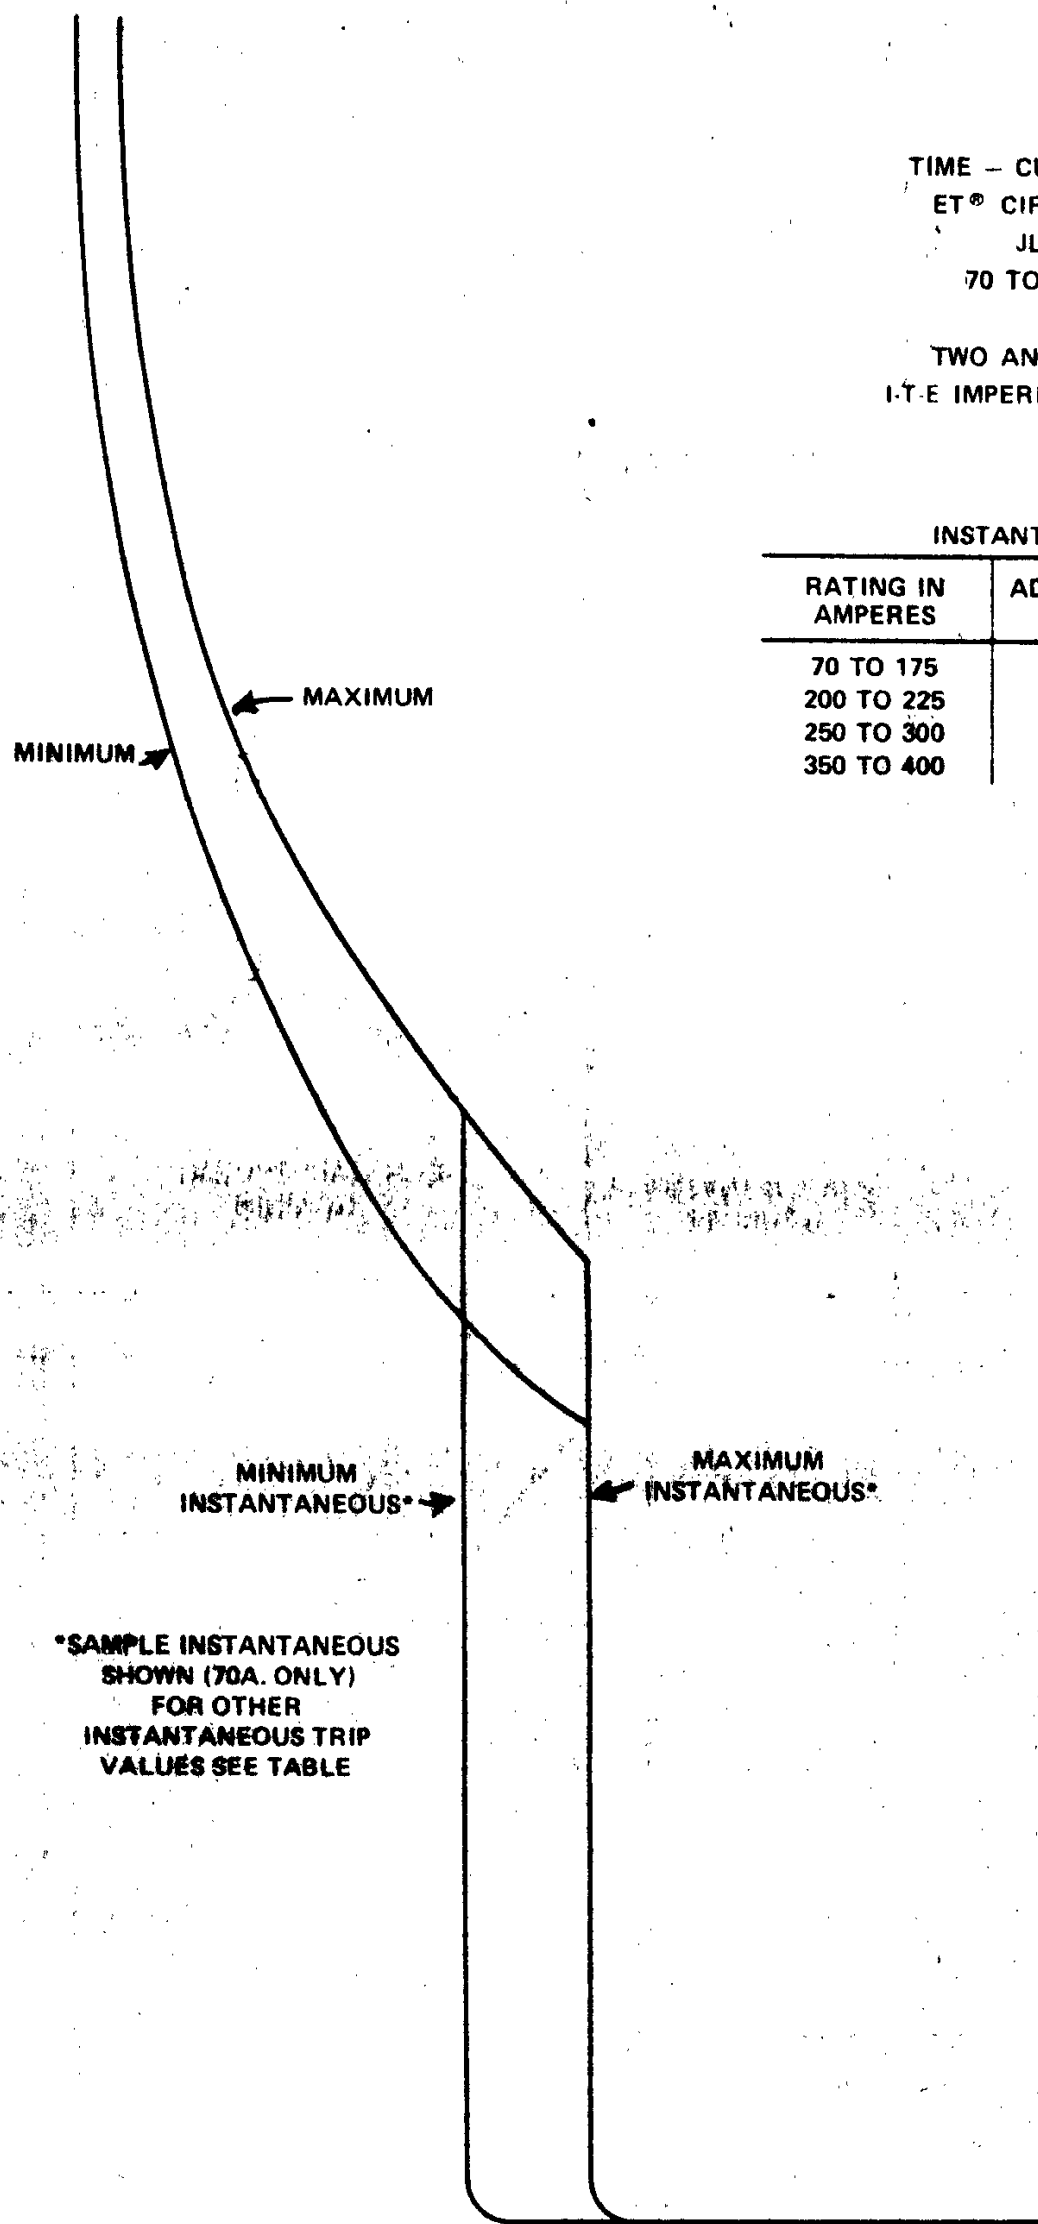

FOR APPLICATION AND COORDINATION PURPOSES ONLY. BASED ON 40°C AMBIENT COLD START. 600 VOLTS 60 HZ, 250 VOLTS DC.