

CS-3 SERIES

E-RATED / MEDIUM VOLTAGE FUSES



HIGHLIGHTS:

- E-Rated
- UL Listed 5.5kV
- Complies with ANSI C37.46



DEFINITIONS:

E-rating

E-rated fuses operate as follows:

100E or less - must melt in 300 seconds (5 mins.) at 200 to 240% of E (ampere) rating.

Over 100E - must melt in 600 seconds (10 mins.) at 220 to 264% of E (ampere) rating.

Example - A 100E fuse must melt in 300 seconds with an applied current of 200 to 240 amperes.

General Purpose Current-Limiting Fuse

A general purpose current-limiting power fuse is one that is capable of interrupting all currents from its rated interrupting rating down to the current that causes melting of the fusible element in one hour.

APPLICATIONS:

- Protection for 5.5 or 15.5kV transformers or distribution systems

5KV AND 15KV FERRULE MOUNTED FUSES

Amp-trap CS-3 E-rated 5kV and 15kV fuses have either 2" or 3" diameter barrels with ferrules and are mounted in spring reinforced clips. They are UL listed as "general purpose current-limiting fuses" and are for use indoors (or outdoors in a weatherproof enclosure). The unique time-current characteristic of Ferraz Shawmut E-rated fuses allows them to be closely sized to transformer full-load rated current, as recommended by IEEE guidelines, without being affected by normal magnetizing inrush current. CS-3 fuses are typically sized at transformer rated current of 133%, thereby providing superior overall protection.

Features/Benefits

- **UL Listed** for compatibility with UL listed equipment
- **Ferrule mounting** for standard clips and interchangeability with other brands of fuses
- **Current Limiting** for superior equipment protection
- **Blown-fuse indicator** gives positive identification of open fuse
- **Non-venting** for silent operation
- **Metal Embossed Catalog Number** and manufacturing date for lasting identification

Ratings

- **A055F**
AC: 5E to 450E
5.5kV, 63kA I.R. Sym.
- **A155F**
AC: 5E TO 200E
15.5kV, 50kA I.R. Sym.

Approvals

- UL Listed to JEEG, "Fuses Over 600 Volts"

Spring-Reinforced Clips for CS-3 Fuses:

228-700-530 (One pair of clips)


E-RATED / MEDIUM VOLTAGE FUSES / A055F

[illegible]


CS-3

E-RATED / MEDIUM VOLTAGE FUSES / A055F

A055F1CORO – 5E to 65E

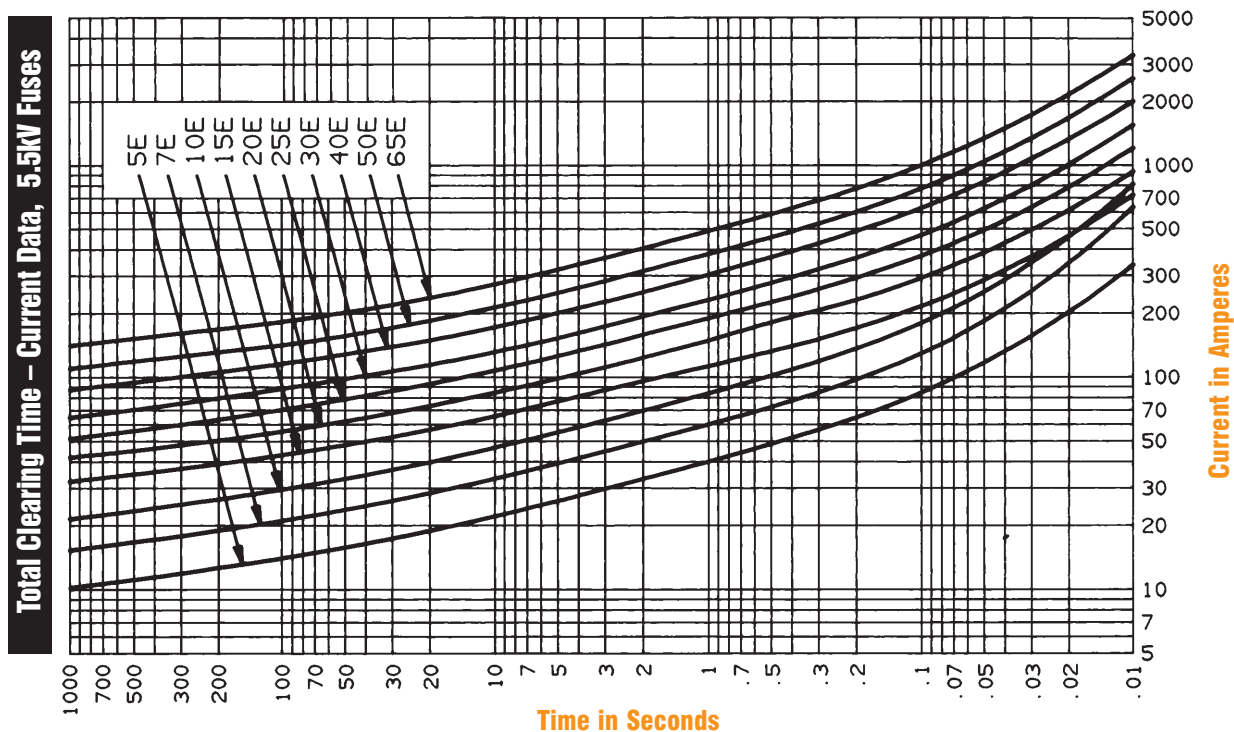


A055F1CORO – 5E to 65E

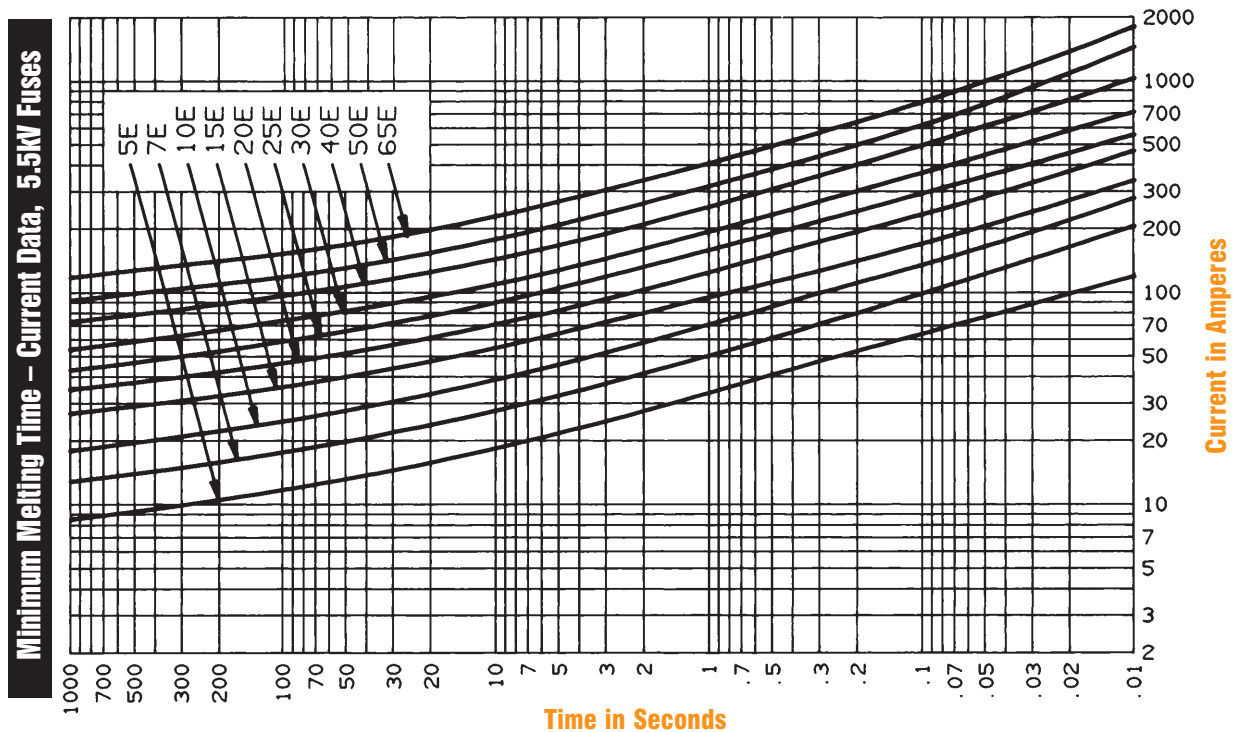


CS-3

E-RATED / MEDIUM VOLTAGE FUSES / A055F

A055F1DORO – 10E to 200E and A055F2DORO – 250E to 450E

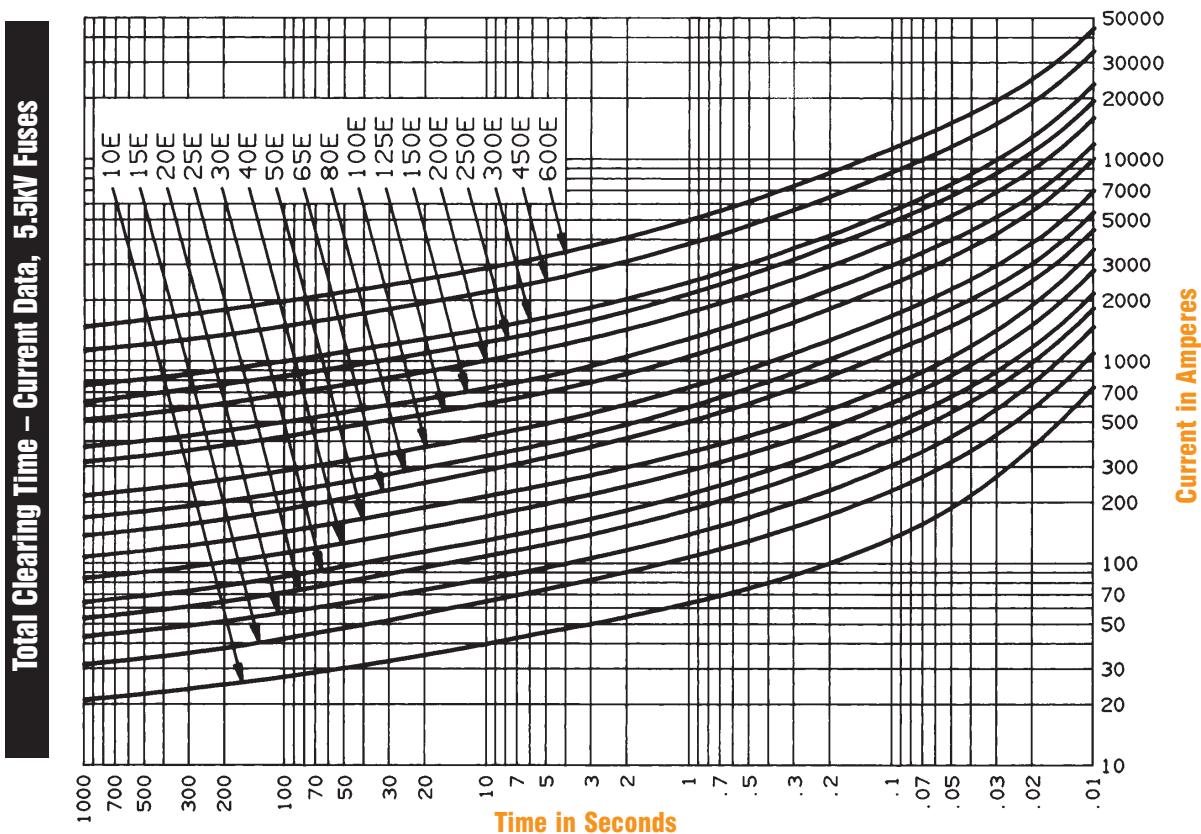

A055F1DORO – 10E to 200E and A055F2DORO – 250E to 450E

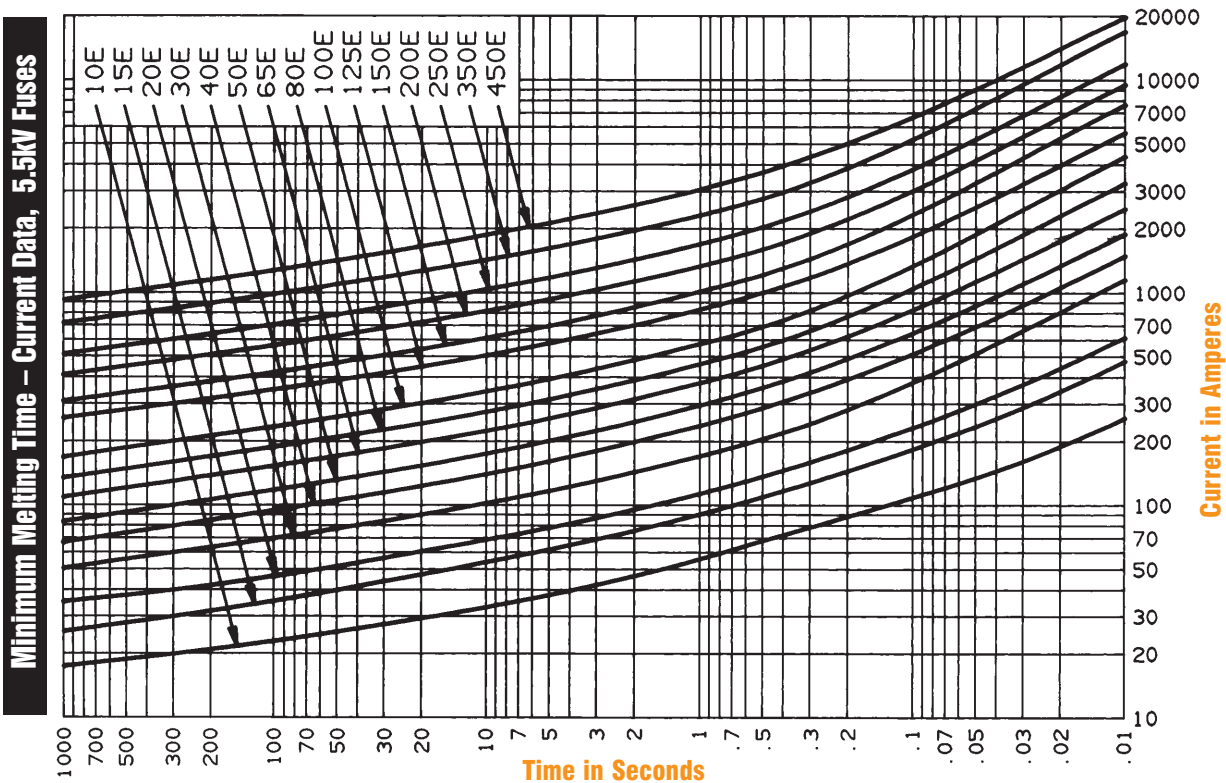


CS-3

E-RATED / MEDIUM VOLTAGE FUSES / A055F

A055F1CORO – 5E to 65E

Peak Let-Thru Current Data, 5.5kV CS-3 Fuses

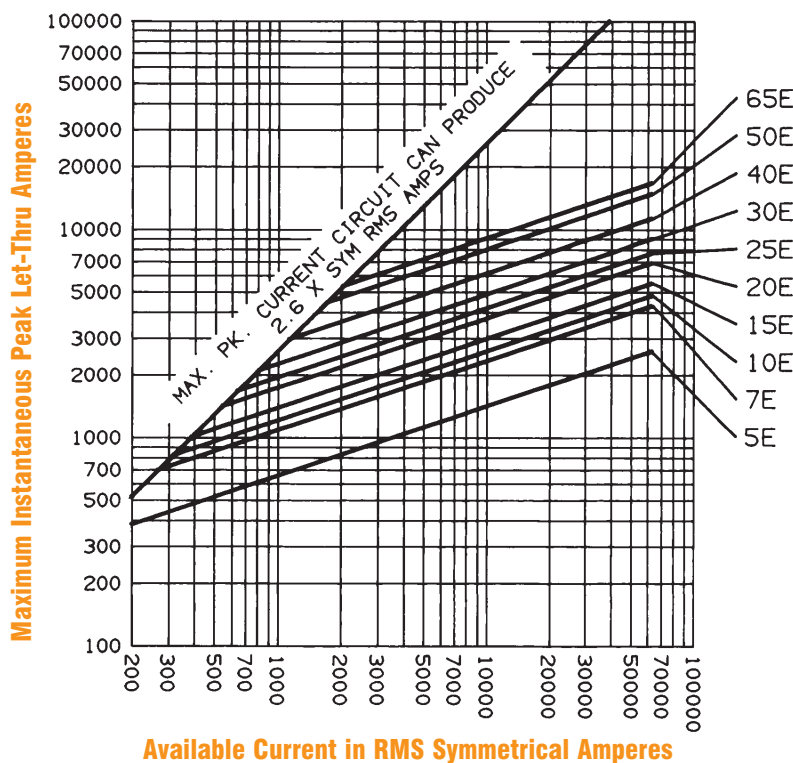

A055F1DORO – 10E to 200E and A055F2DORO – 250E to 450E

Peak Let-Thru Current Data, 5.5kV CS-3 Fuses

