


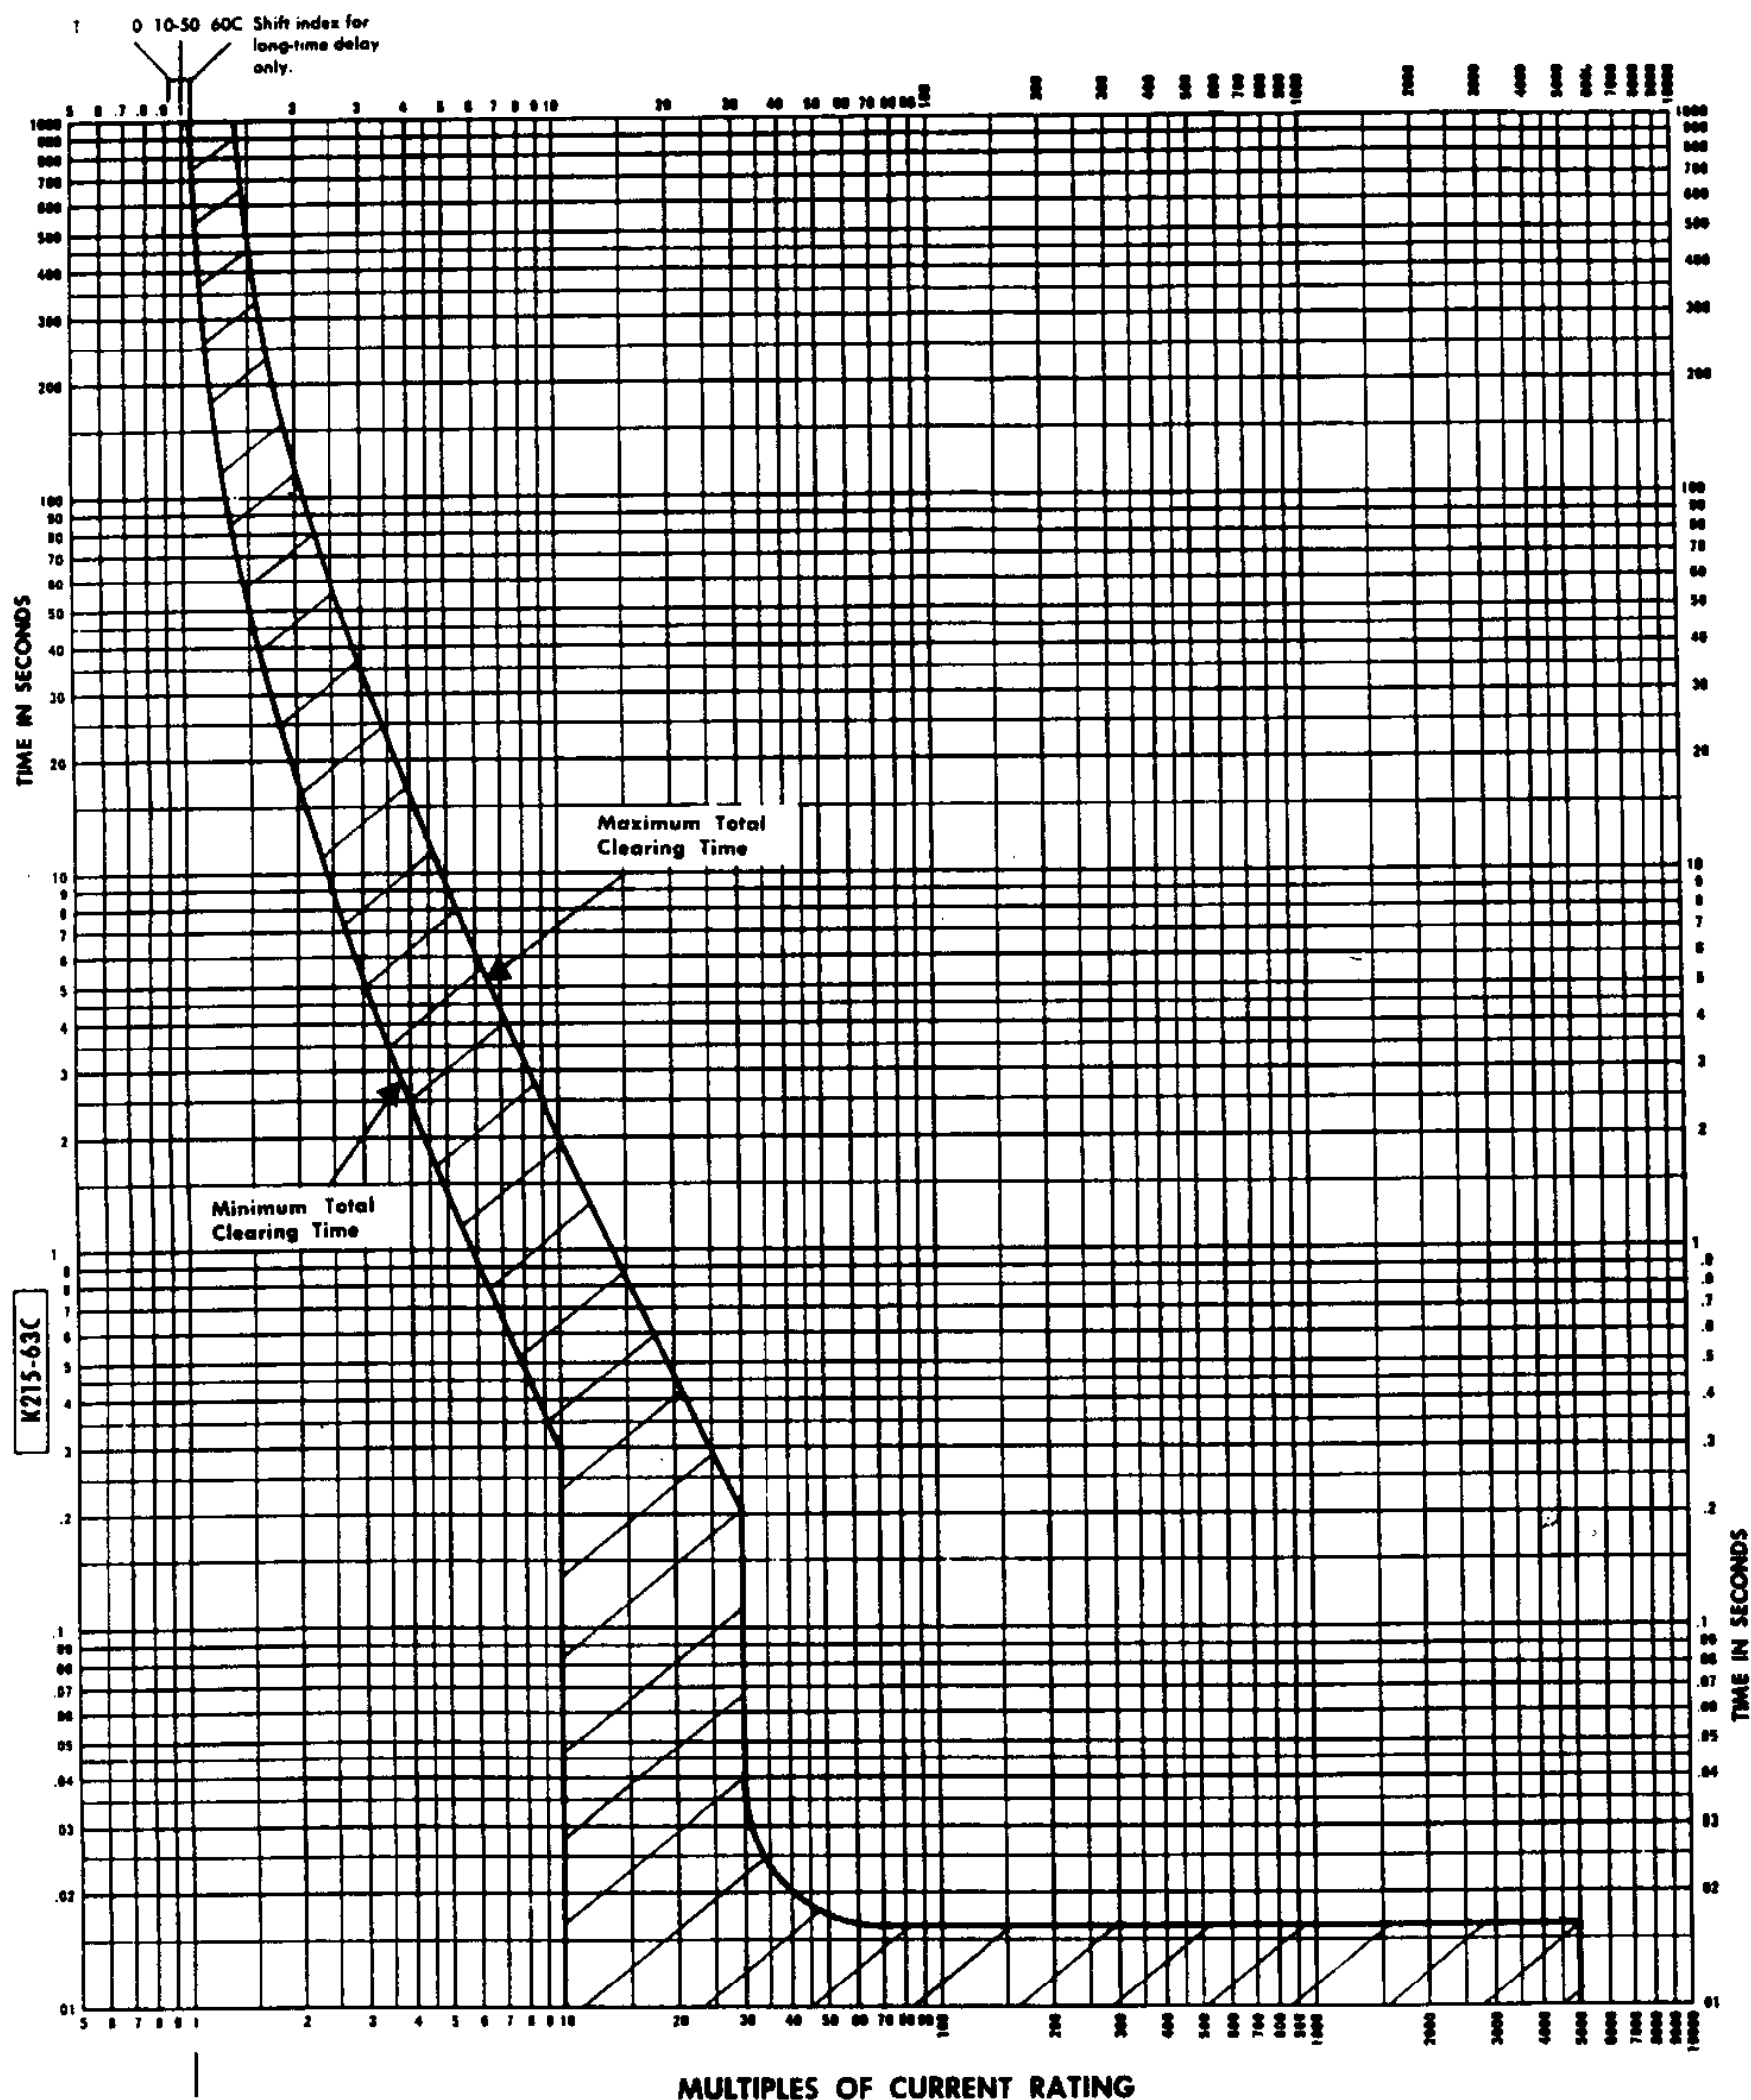

GENERAL ELECTRIC	MOLDED-CASE CIRCUIT BREAKER "Q" LINE	K215-63C
Current Ratings 15, 20 and 30 Amperes TXQL, TXQB & TXQC 15, 20, 30, 40 and 50 Amperes Voltage Ratings 1 and 2 Pole—120/240 Volts, A-c 2 and 3 Pole—240 Volts, A-c Frequency Rating 60 Cycles	AMBIENT COMPENSATED Types TQL-AC (2 & 3 Pole), TXQB, TXQC & TXQL (1 & 2 Pole) TQB, THQB, TQC, THQC and THQL-AC (1, 2 & 3 Pole) Long-time Delay and Instantaneous Time-current Curve (Curves show circuit breaker in open air, 10-50C ambient, wired with conductors of corresponding rating, no prior load. For all other ambients use rating shift index at top of sheet.)	Adjustments Long-time delay thermal trip: not adjustable Instantaneous magnetic trip: not adjustable