


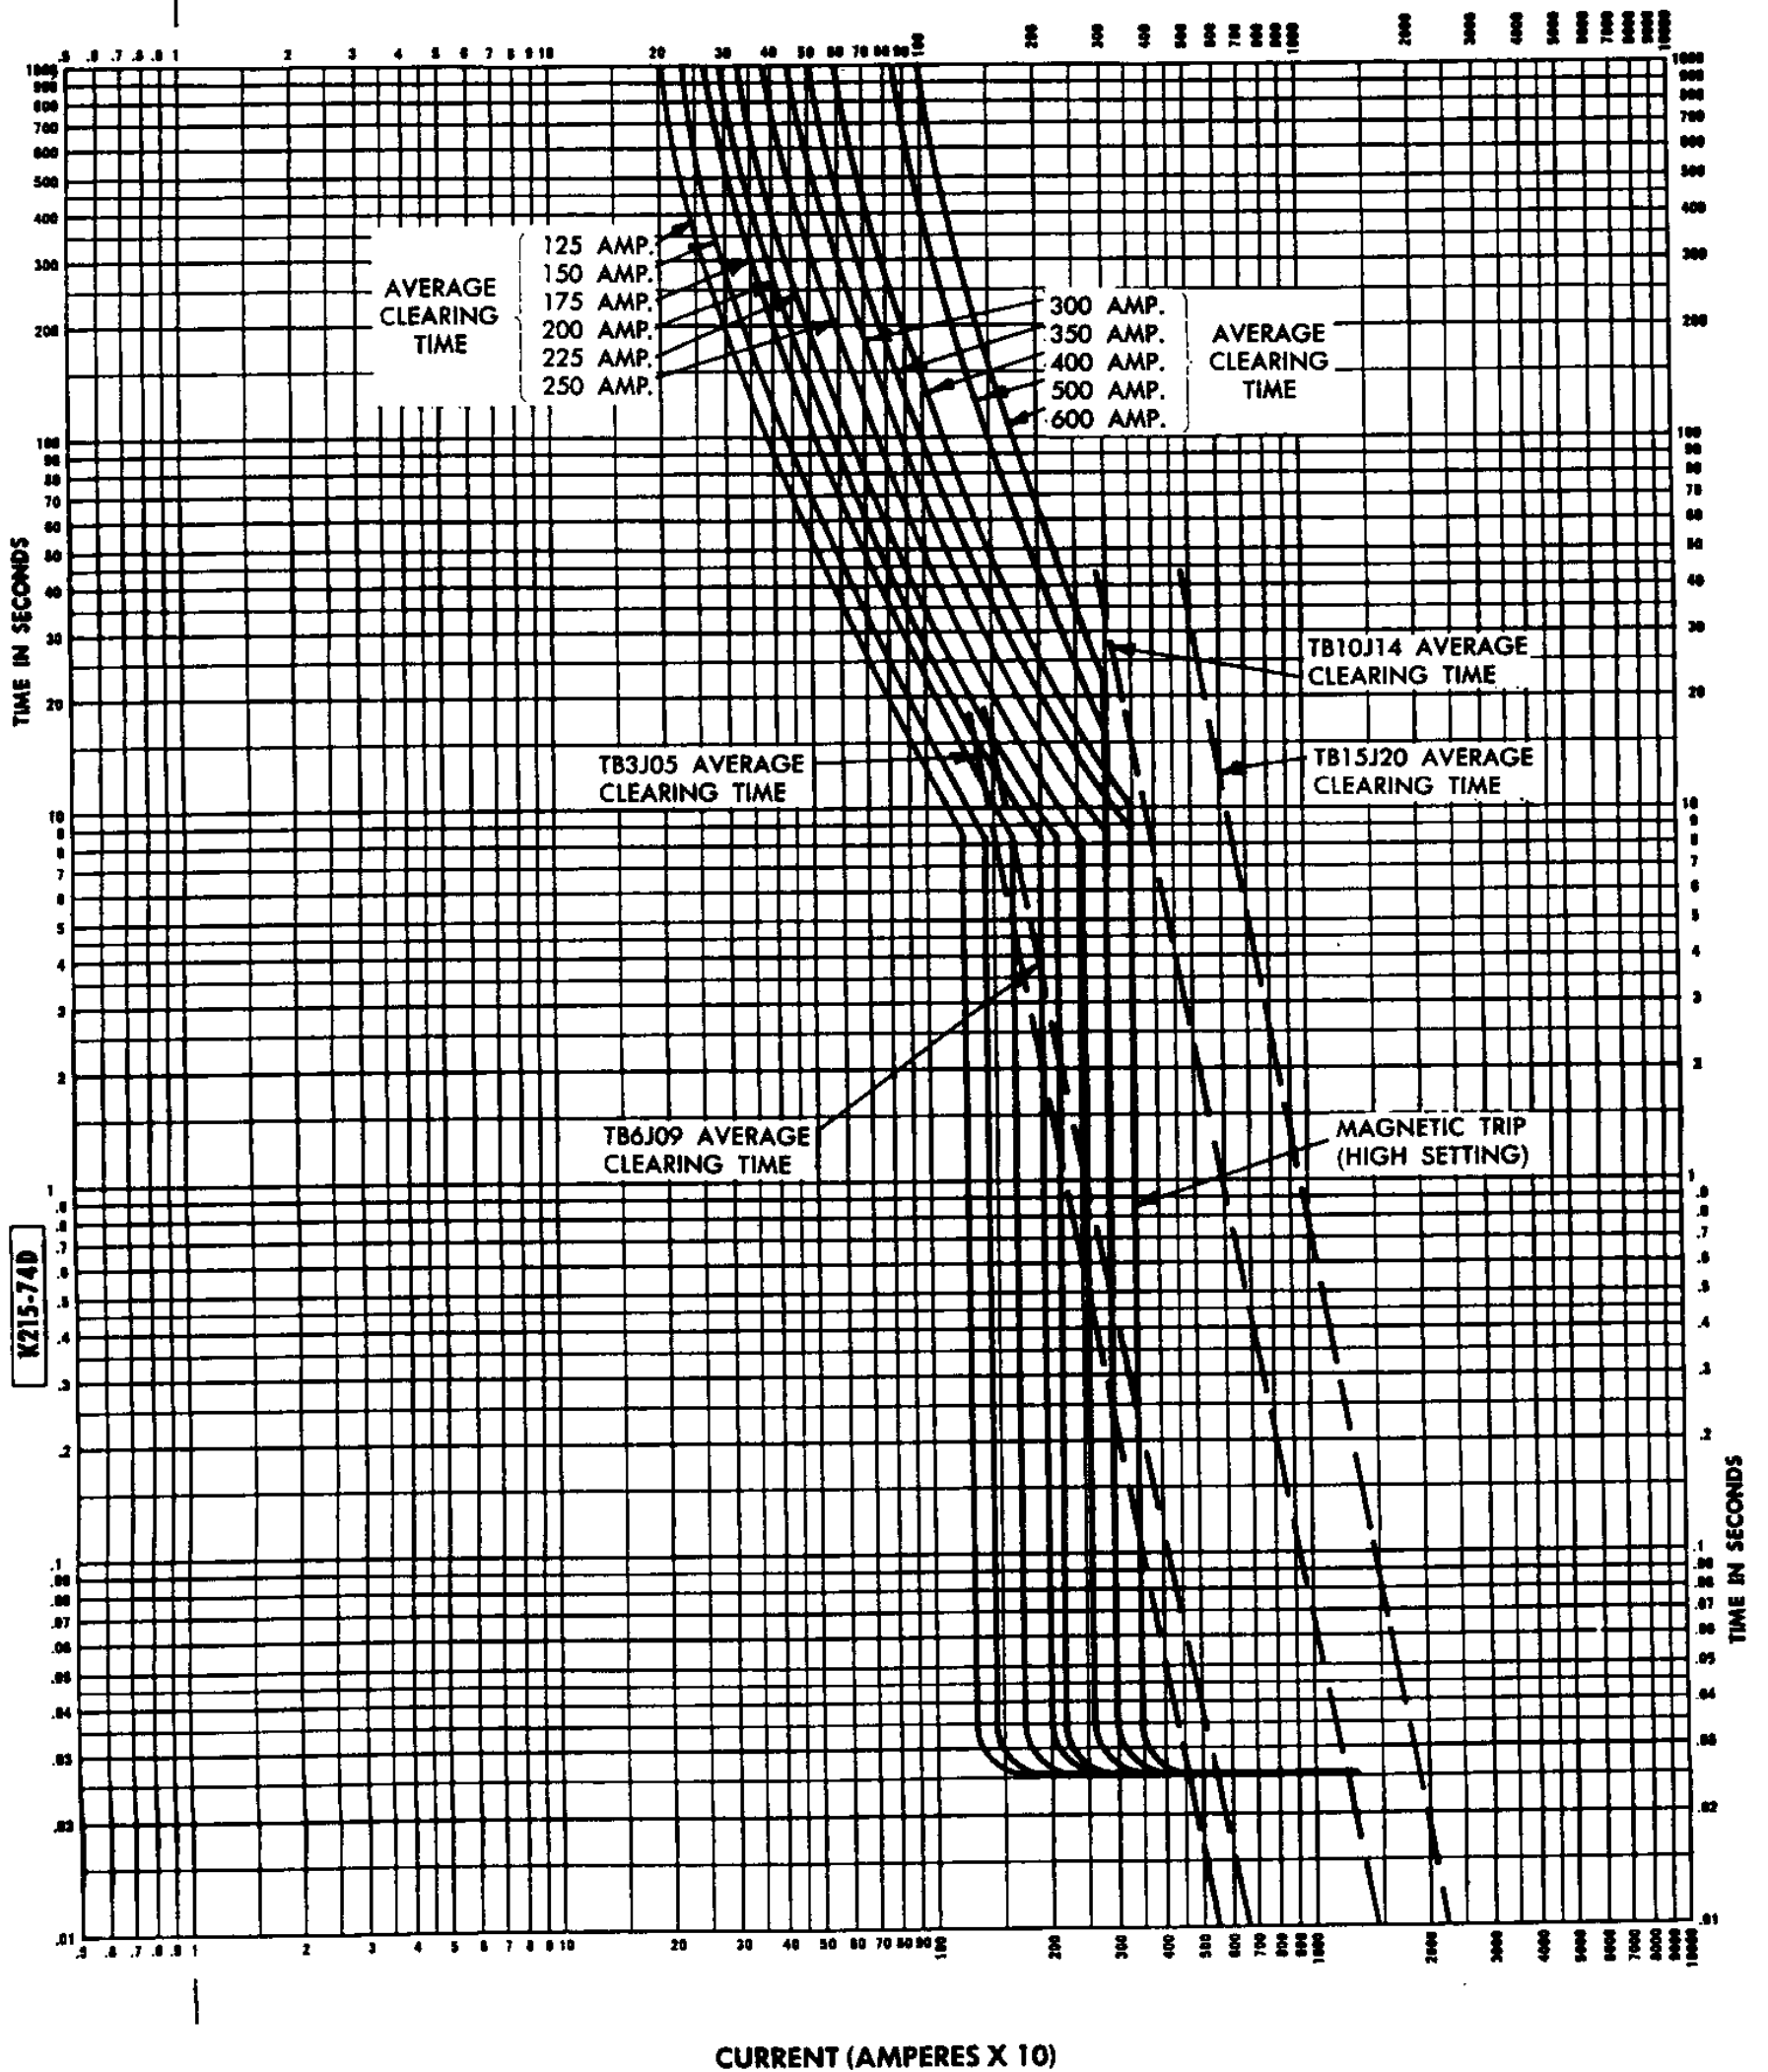

GENERAL ELECTRIC Current Ratings 125, 150, 175, 200, 225, 250, 300, 350, 400, 500 and 600 Amperes Voltage Ratings 600 Volts A-c; 250 Volts D-c Frequency Ratings D-c or 60 Cycles	INTEGRALLY FUSED MOLDED CASE CIRCUIT BREAKER TRI-BREAK LINE TYPE TB6 (125-600 AMPERES) Thermal trip, Magnetic trip & Current Limiter Characteristics Time vs RMS Current	K215-74D Adjustments Long time delay thermal trip, not adjustable. Instantaneous magnetic trip, continuously ad- justable, set on HI.
---	---	--

REV. 11-21-65

CIRCUIT PROTECTIVE DEVICES DEPARTMENT, PLAINVILLE, CONNECTICUT