


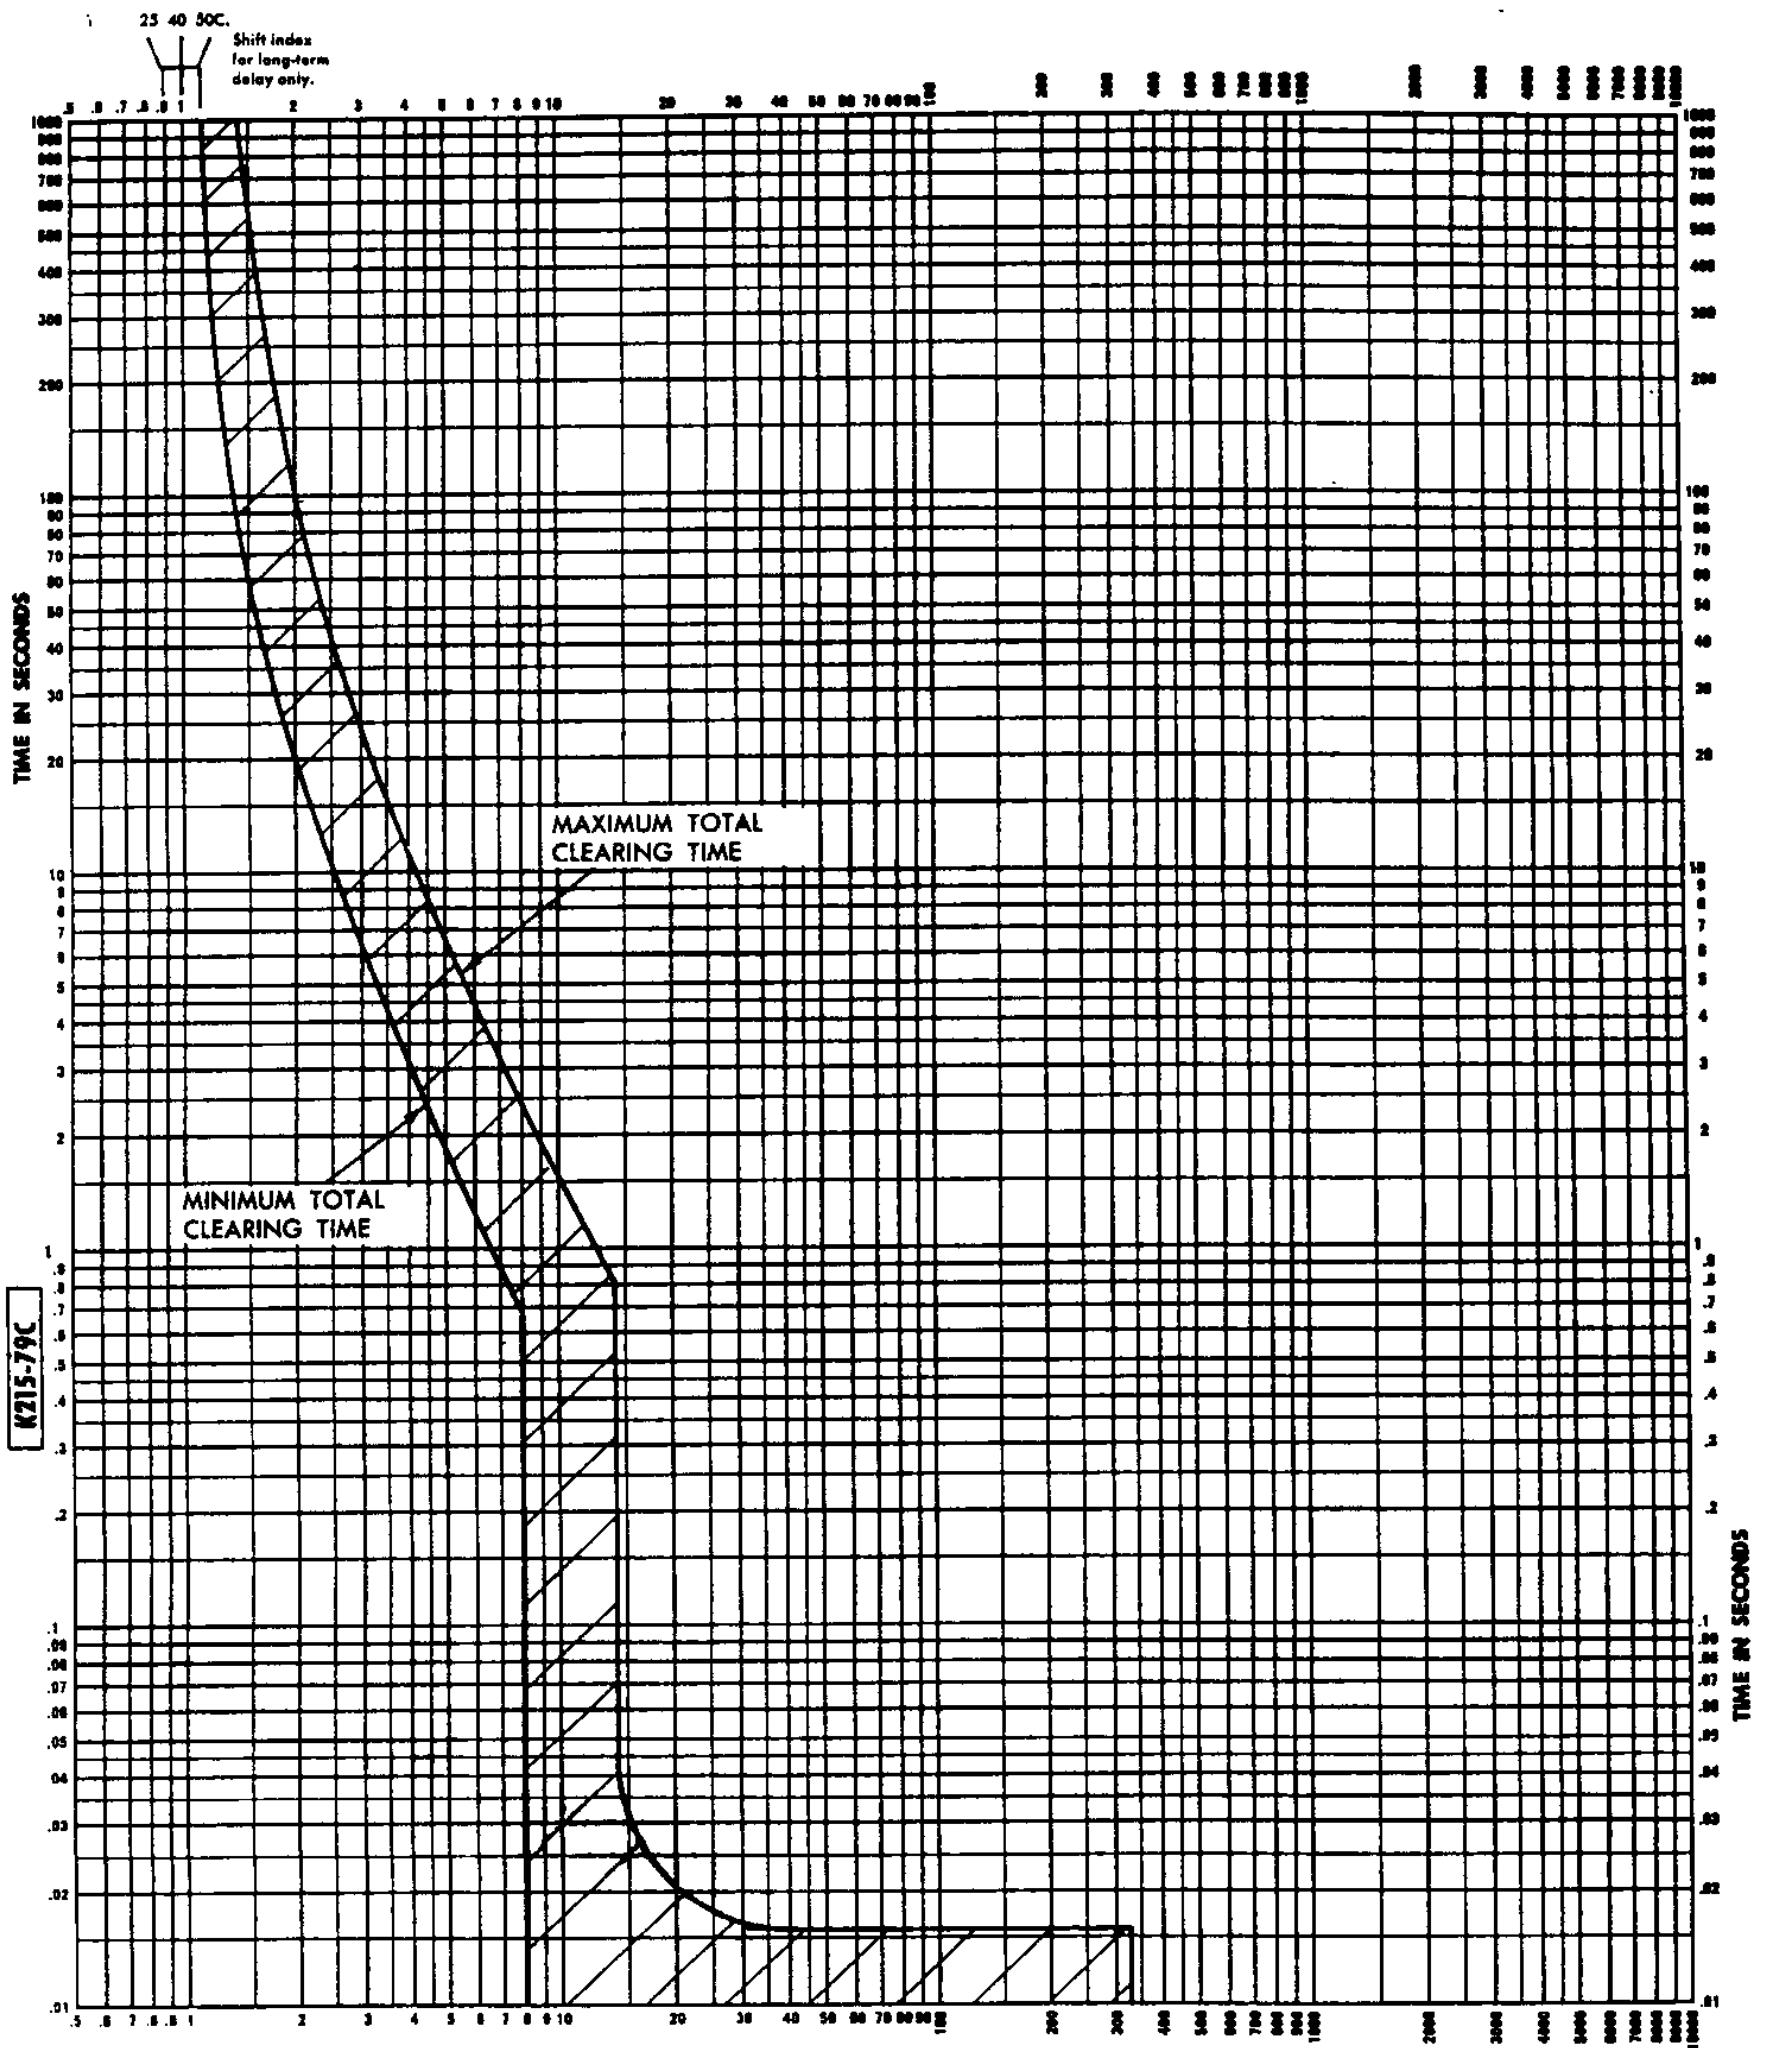

MULTIPLES OF CURRENT RATING

GENERAL ELECTRIC	MOLDED CASE CIRCUIT BREAKERS "Q" LINE	K215-79C
Current Ratings 15, 20, 30, 40 and 50 Amperes Voltage Ratings 120/240 Volts, A-c Frequency Ratings 60 Cycles	Type TQP (1 and 2 Pole) Long-time Delay and Instantaneous Time-current Curves (Curves show circuit breaker in open air, 40°C ambient, wired with conductors of corresponding rating, no prior load. For all other ambients use rating shift index at top of sheet.)	Adjustments Long-time delay thermal trip, not adjustable. Instantaneous magnetic trip, not adjustable.

RE 7-68

CIRCUIT PROTECTIVE DEVICES DEPARTMENT, PLAINVILLE, CONNECTICUT