

20	30	40	50	60	70	80	90	100	200	300	400	500	600	700	800	900	1000	2000	3000	4000	5000	6000	7000	8000	9000	10000
----	----	----	----	----	----	----	----	-----	-----	-----	-----	-----	-----	-----	-----	-----	------	------	------	------	------	------	------	------	------	-------

THE LONDON TIMES
DE LAZAR BAND

L-1-E TYPE OD-2
DUAL SELECTIVE OVERCURRENT TRIP

NOTE 21 THE MAXIMUM CIRCULAR BREATHING RATE IS INDICATED BY THE LOWER WHITE LINE OF THIS BAND AND REPRESENTS THE MAXIMUM RATE FOR WHICH THE OVERCURRENTS CAN BE WITHSTOOD GIVEN VALUE AND THE CURRENT RATED THEREIN. THE CURRENT REDUCE TO 80% OF THE RATED TO 80% OF THE COIL RATED CURRENT.

1994年12月15日

ORDER NO.

TEST NOW


DOWN BY R. BURNS

FREE NOC

DATE 11-30

FD-5083-A

REV 1

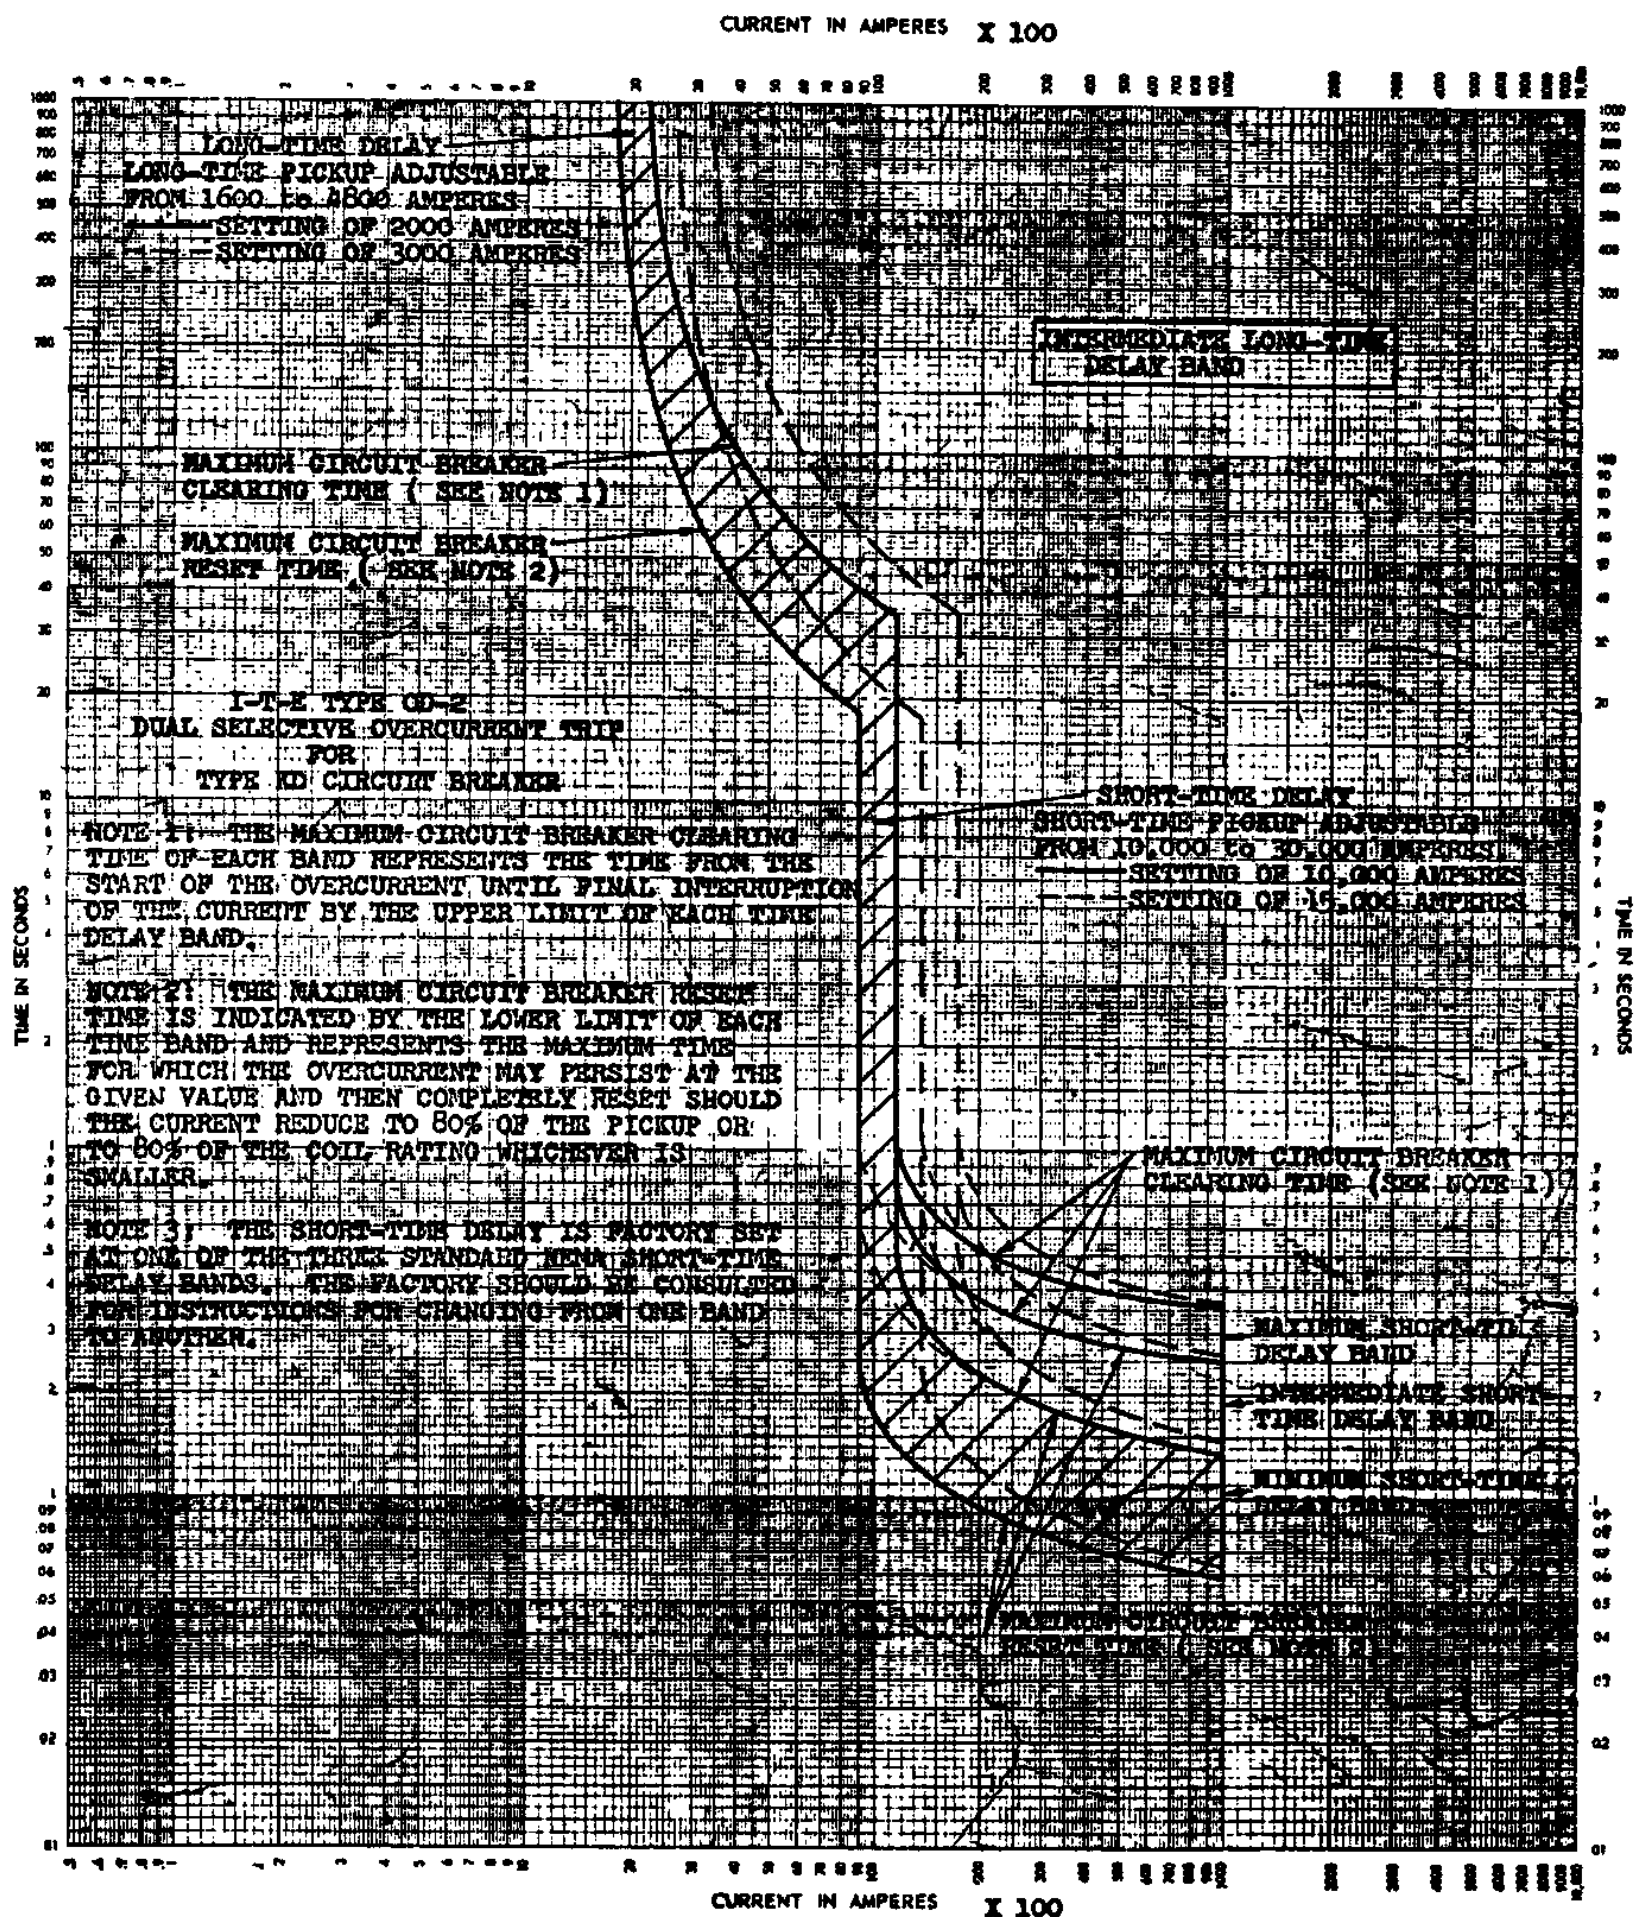


TIME-CURRENT CHARACTERISTIC CURVES TYPE OD-2 TRIP DEVICE FOR
I-T-E TYPE KD CIRCUIT BREAKER AS PER
NEMA STANDARD S03-3.25, SEPTEMBER, 1955

ORDER NO. _____
TEST NO. _____ FILE NO. _____
DWN. BY R. BURNS DATE 11-30-55
NO. **TD-5083-B** REV. 1

I-T-E CIRCUIT BREAKER CO.
PHILADELPHIA, PA.

CURRENT IN AMPERES X 100

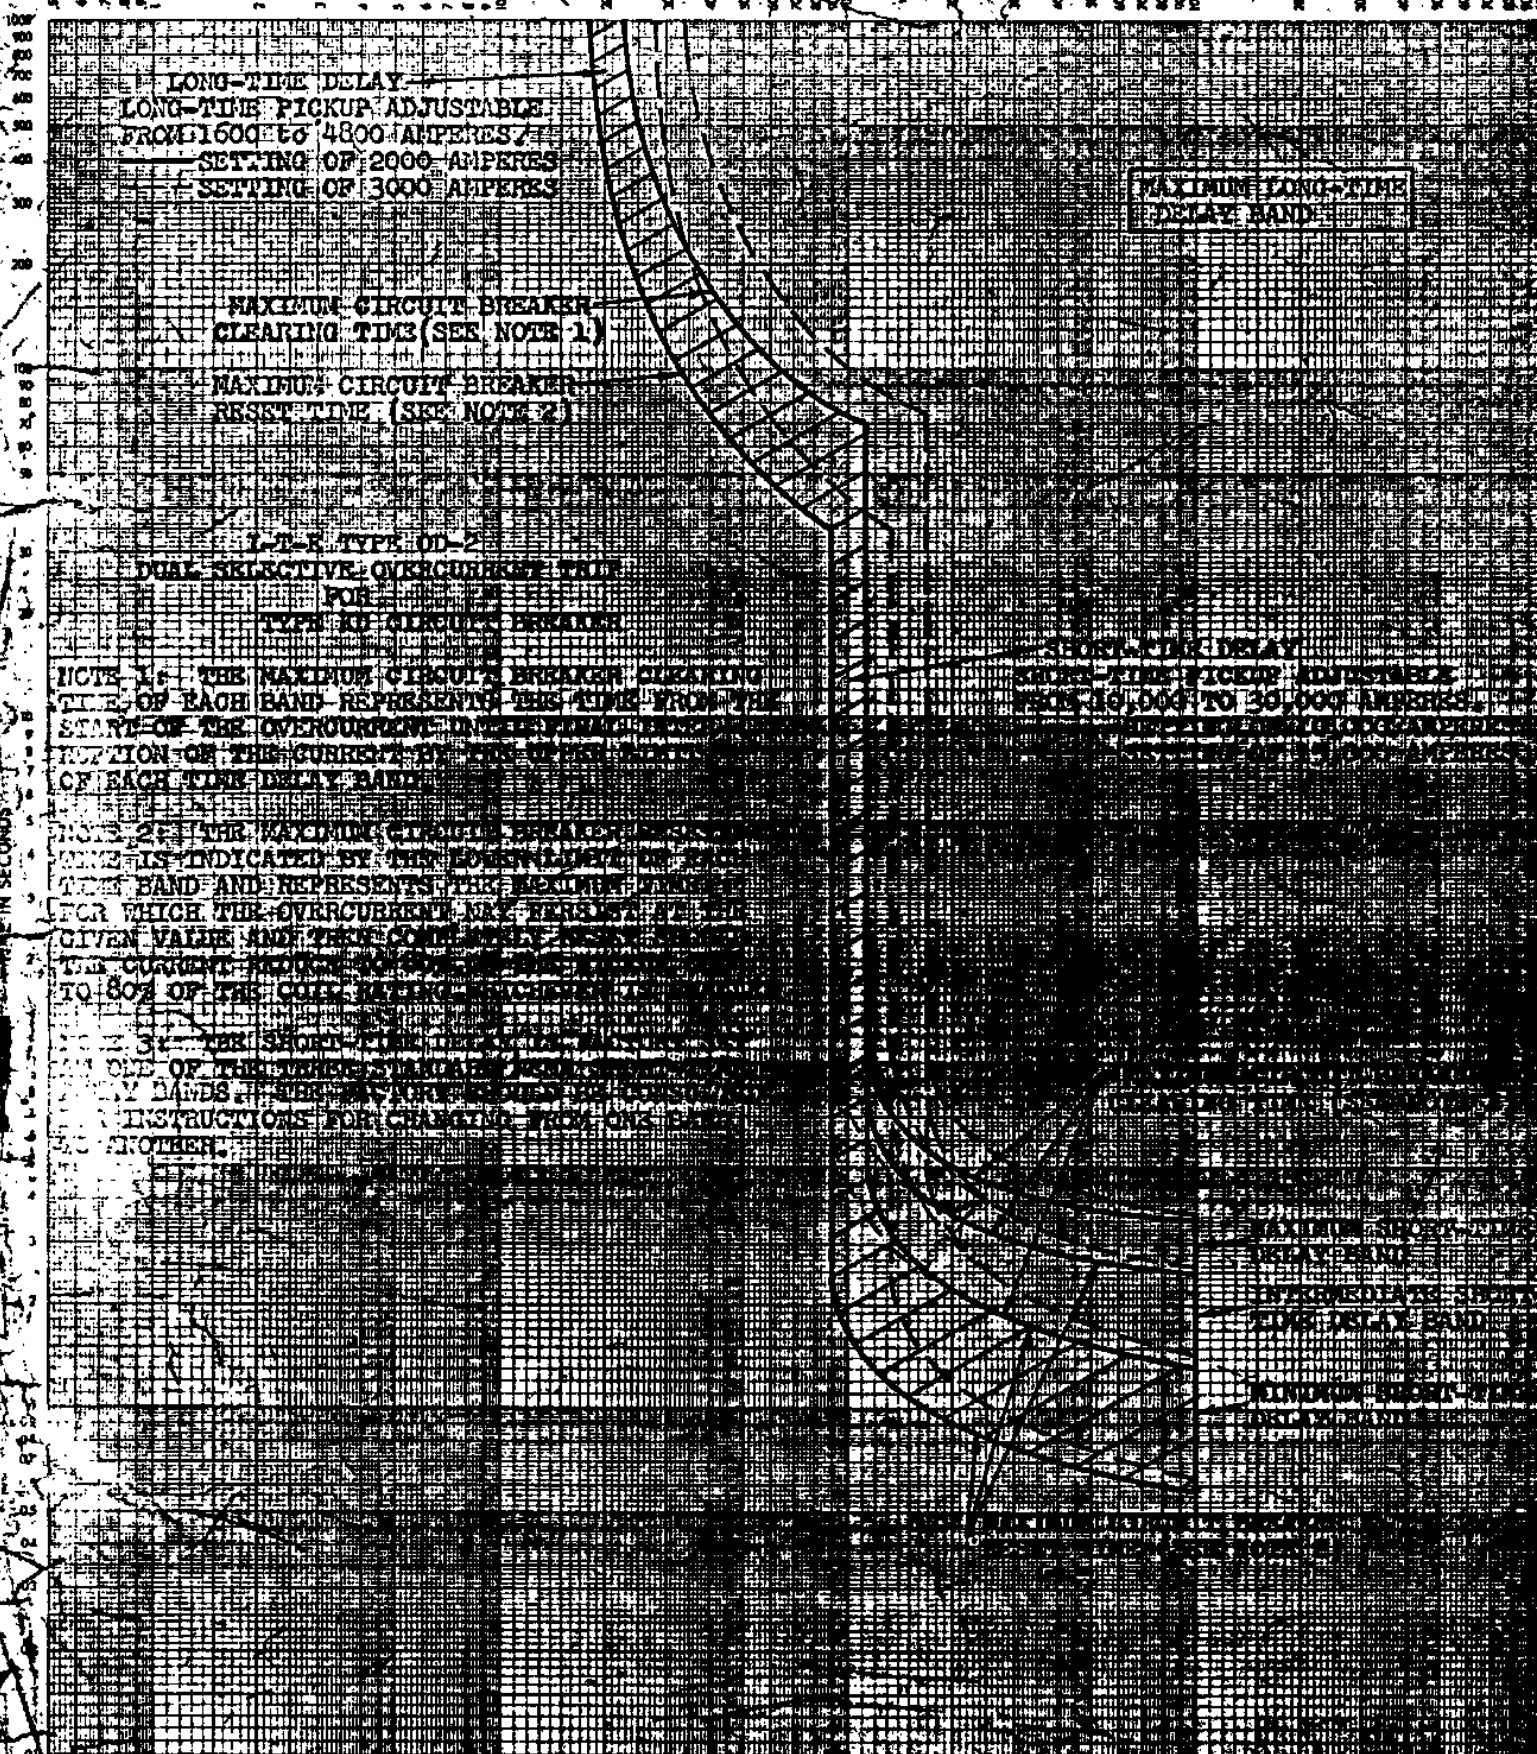

CURRENT IN AMPERES X 100

TIME-CURRENT CHARACTERISTIC CURVES TYPE OD-2 TRIP DEVICE FOR
I-T-R TYPE RD CIRCUIT BREAKER AS PER
NEMA STANDARD SQ3-3.25, SEPTEMBER, 1955

ORDER NO.
TEST NO.
OWN. BY: R. BURNS DATE: 11-30-55
NO. TD-5083-C REV.