


Range Finder Toroid

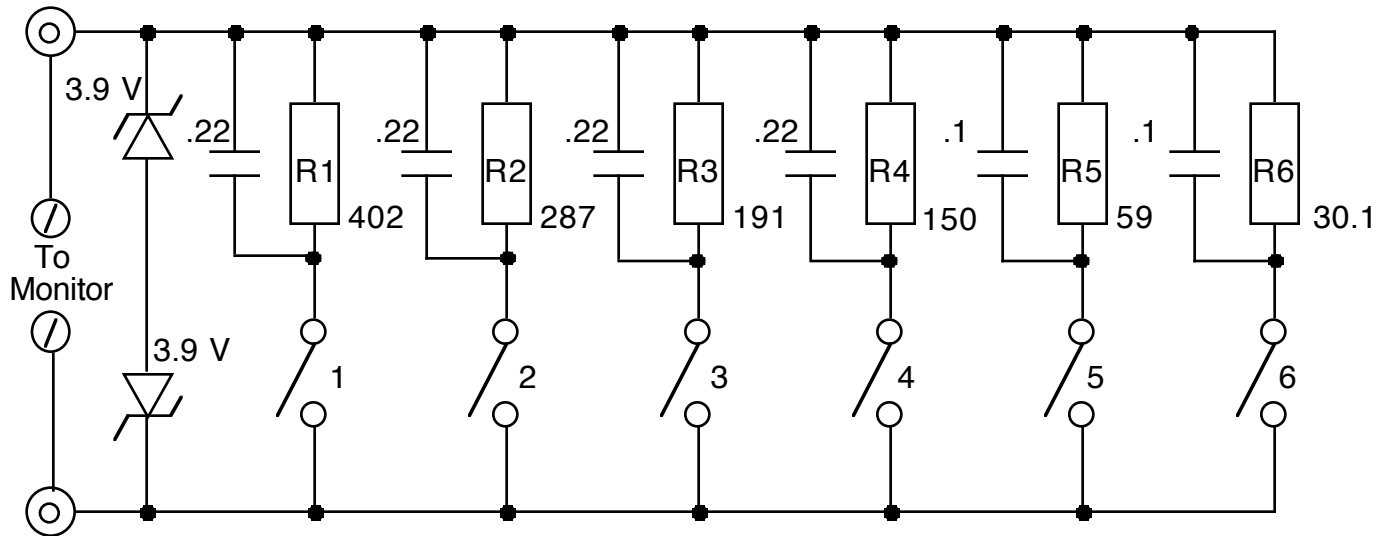

Notes:

- 1) Maximum Terminal Voltage < 5 VAC
- 2) Terminal Voltage for typical Full Scale is 1.875VAC @ power factor of 1 for all ranges.
- 3) Values shown are +/- 1%

Electrical Input Power with no corrections for power factor or efficiency @ 460 VAC.

<u>Dip Switch Position:</u>		<u>K.W.</u>	<u>H.P.</u>	
1.	5.03A	4.00	5.37	(Also used with C.T's for motors above 50 HP)
2.	6.90A	5.50	7.37	
3.	10.20A	8.13	10.89	
4.	12.90A	10.28	13.78	
5.	32.16A	25.62	34.35	
6.	62.83A	50.06	67.10	